

FLUORESCENT INK, AND INK CARTRIDGE, RECORDING UNIT,  
INK-JET RECORDING METHOD, AND INK-JET RECORDING  
APPARATUS EMPLOYING THE FLUORESCENT INK

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a fluorescent ink capable of forming a fluorescent image, and a recording unit, an ink cartridge, an ink-jet recording method, and an ink-jet recording apparatus employing the fluorescent ink.

Related Background Art

In ink-jet recording, the ink is ejected by utilizing various methods such as attraction by electrostatic force, mechanical vibration or displacement from a piezo element, pressure caused by bubbles formed by heating the ink, and so forth. In recent years, inks are required to be useful for ink-jet recording in various application fields. In such application fields, various techniques are disclosed not only for forming beautiful color images but also for forming fluorescent images for recording information such as characters, numerals, symbols, and bar codes on a recording medium to record non-visible information (e.g., security information). The fluorescent inks are promising in various application fields, so that development of the fluorescent ink

which has high stability, high reliability, and high fluorescence developability is awaited. Inks containing a coloring materials having fluorescence developability (hereinafter, fluorescent coloring materials) disclosed in Japanese Patent Application Laid-Open Nos. 8-151545, 9-132729, 10-193775, 10-298462, and 10-298467; and Japanese Patent No. 233038. Various new recording methods and fluorescent coloring materials are disclosed therein.

5 The use of a fluorescent coloring material is disclosed, for example, in Japanese Patent Application Laid-Open Nos. 5-293976, 6-191143, 6-322307, 7-009755, 7-305013, 8-053639, 9-003375, 9-01294, 9-137097, 9-137098, 9-137099, 9-165539, 9-241565, 9-255904, 9-286939, 10-007962, 10-183043, 11-080639, 11-320921, and 15 2000-038529; and Japanese Patent No. 2995853.

The water-soluble fluorescent dye useful as a component of the aqueous fluorescent ink includes C.I.(Color Index No.) Basic Red 1, C.I. Basic Red 2, 20 C.I. Basic Red 9, C.I. Basic Red 12, C.I. Basic Red 13, C.I. Basic Red 14, C.I. Basic Red 17, C.I. Acid Red 51, C.I. Acid Red 52, C.I. Acid Red 92, C.I. Acid Red 94, C.I. Basic Violet 1, C.I. Basic Violet 3, C.I. Basic Violet 7, C.I. Basic Violet 10, and C.I. Basic Violet 14. 25

Of these dyes, C.I. Acid Red 52, which comes to be excited at an excitation wavelength of about 260 nm to

00923993-000001


fluoresce at wavelength of 580-640 nm, is especially useful as the coloring material of a fluorescent ink for ink-jet recording, since this dye produces intense fluorescence, having high water-solubility, and causing little problem in safety in comparison with other fluorescent basic dyes.

C.I. Acid Red 52, however, is extremely poor in water resistance. Upon contact with water, the prints recorded with a fluorescent ink-jet recording ink containing such a dye, may lose the characteristic fluorescence, or the printed information may be completely vanished.


## SUMMARY OF THE INVENTION

15 The present invention intends to provide a  
fluorescent ink which is capable of forming a highly  
fluorescent image with high water resistance of the  
print, especially a fluorescent ink which is capable of  
forming a highly fluorescent red image with excellent  
20 color tone and high water resistance of the print; and  
further intends to provide an ink unit, an ink  
cartridge, an ink-jet recording method, and an ink-jet  
recording apparatus employing the fluorescent ink.  
Incidentally, in the present invention, the term "water  
25 resistance" signifies not only the capability of  
retaining the fluorescence of the image but also  
capability of retaining the visibly recognizable state



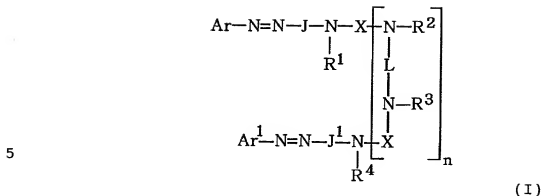


In General Formula (I), Ar and Ar<sup>1</sup> are respectively a substituted or unsubstituted aryl group, and at least one of Ar and Ar<sup>1</sup> has a substituent selected from COOH and COSH; J and J<sup>1</sup> are respectively a group selected from the following General Formulas (1), (2), and (3) below:

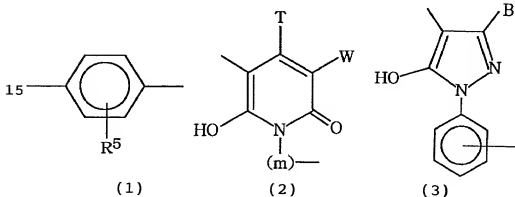


(In General Formula (1), R<sup>5</sup> is independently selected from H, alkyls, substituted alkyls, alkoxy, halogens, CN, ureido, and NHCOR<sup>6</sup>; R<sup>6</sup> being selected from H, alkyls, substituted alkyls, aryls, substituted aryls, aralkyls, and substituted aralkyls. In General Formula (2), T is an alkyl; W is selected from H, CN, CONR<sup>10</sup>R<sup>11</sup>, pyridium, and COOH; (m) is an alkylene chain of 2-8 carbon atoms; R<sup>10</sup> and R<sup>11</sup> are selected from H, alkyls, and substituted alkyls. In General Formula (3), B is


selected from H, and alkyls, and COOH.); and  
in General Formula (I),  $R^1$ ,  $R^2$ ,  $R^3$ , and  $R^4$  are  
respectively selected from H, alkyls, and substituted  
alkyls; L is a divalent organic bonding group; n is an  
integer of 0 or 1; X is a carbonyl, or one of the  
following General Formulas (4), (5), and (6) below:



(4)



(5)



(6)

(In General Formulas (4), (5) and (6), Z is selected  
from  $OR^7$ ,  $SR^7$ , and  $NR^8R^9$ ; Y is selected from H, Cl, CN,  
and Z; E is selected from Cl and CN;  $R^7$ ,  $R^8$ , and  $R^9$  are  
respectively selected from H, alkenyls, substituted  
alkenyls, alkyls, substituted alkyls, aryls,  
substituted aryls, aralkyls, and substituted aralkyls;  
and  $R^8$  and  $R^9$  may form a five-membered or six-membered  
ring together with the nitrogen atom bonding  
therewith.)

When the dye of General Formula (I) does not have  
an  $SO_3H$  group, the dye has at least two groups selected  
from a COOH group and a COSH group. When the dye of  
General Formula (I) has one or more  $SO_3H$  groups, the dye  
has groups selected from a COOH group and a COSH group  
at least in the same number as the number of  $SO_3H$ .

The aforementioned fluorescent ink is useful in ink-jet recording.

According to another aspect of the present invention, a recording unit is provided which has an  
5 ink container containing the aforementioned fluorescent ink for ink-jet recording, and a head for ejecting the ink.

According to still another aspect of the present invention, an ink cartridge is provided which has an  
10 ink container containing the aforementioned fluorescent ink.

According to a further aspect of the present invention, an ink-jet recording method is provided which comprises a step of ejecting the aforementioned  
15 fluorescent ink for ink-jet recording by application of energy to the ink.

According to a still further aspect of the present invention, an ink-jet recording apparatus is provided which has an ink container containing the  
20 aforementioned fluorescent ink for ink-jet recording, and a recording head for ejecting the ink.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a vertical sectional view of a head of  
25 an ink-jet recording apparatus.

Fig. 2 is a lateral sectional view of the head of an ink-jet recording apparatus.

00923997 000001  
TOP SECRET

Fig. 3 is a perspective external view of a multiple head having the head shown in Fig. 1 in juxtaposition.

Fig. 4 is a schematic perspective view of an ink-  
5 jet recording apparatus.

Fig. 5 is a vertical sectional view of an ink cartridge.

Fig. 6 is a perspective view of a recording unit.

Fig. 7 is a schematic sectional view showing  
10 constitution of another ink-jet recording head.

Fig. 8 is a drawing for explaining a relation of the coloring material concentration with the fluorescence intensity.

Fig. 9 is a drawing for explaining a relation of  
15 the coloring material concentration with the fluorescence intensity.

Fig. 10 is a drawing for explaining a relation of the coloring material concentration with the fluorescence intensity.

Fig. 11 is a drawing for explaining the  
20 fluorescence intensity when another coloring material is used supplementally in combination.

Fig. 12 is a drawing for explaining the  
fluorescence intensity when another coloring material  
25 is used supplementally in combination.

Fig. 13 is a drawing for explaining the fluorescence intensity when another coloring material

09225937-08001



is used supplementally in combination.

Fig. 14 is a drawing for explaining the fluorescence intensity when another coloring material is used supplementally in combination.

5        Fig. 15 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

10       Fig. 16 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

Fig. 17 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

15       Fig. 18 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

Fig. 19 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

20       Fig. 20 is a drawing for explaining the mechanism of color development having the fluorescent intensity of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25       The present invention is described below in detail by reference to preferred embodiments.

(First Embodiment)

002297-00001

The fluorescent ink of a first embodiment of the present invention comprises C.I. Acid Red 52 and at least one direct dye as the coloring materials, and an aqueous liquid medium for dissolving the dyes. C.I.

- 5 Acid Red 52 is selected as mentioned above from numerous fluorescent dyes, being capable of fluorescing at a very high intensity, and being highly soluble in water.

- 10 The ink employing this C.I. Acid Red 52 solely as the dye, however, gives poor water resistance of the formed print, as mentioned before. To solve this problem, the inventors of the present invention made studies comprehensively, and found that combined use of at least one direct dye with the above C.I. Acid Red 52  
15 as the coloring material in a specified ratio is effective to form a highly fluorescent image which is not erasable by contact with water. Thus the present invention has been achieved.

- Further, the inventors of the present invention  
20 made comprehensive study to obtain an ink which gives high water resistance of the print and also forms a red image with high fluorescence intensity. Consequently, it was found that supplementary use of a direct dye is especially effective, the direct dye having a color  
25 tone, in L'a'b' color space, of a' ranging from -20 to 60, b' ranging from -5 to 60, and  $\sqrt{(a'^2+b'^2)}$  of 30 or more. The above values of L'a'b' color space were

00923993.000801

obtained by forming a 100%-solid print on a plain paper sheet (PB paper supplied by Canon Inc.) with an ink composed of diethylene glycol 30 wt%, coloring material 5 wt%, and water 65 wt% by means of an ink-jet recording apparatus BJC-4000 (manufactured by Canon Inc.) having an on-demand type multiple recording head which ejects ink by application of thermal energy in correspondence with recording signals; and measuring the color by means of a spectral color measurement system CMS-500 (manufactured by Murakami Shikisai K.K.) according to JIS Z 8722.

As the results of further study on the direct dyes, the inventors of the present invention found that supplementary use of a direct dye which has two or more azo groups in the molecule or has a dimer structure, specifically the dye represented by the above General Formula (I') gives water-resistant prints without significantly impairing the fluorescence developability of C.I. Acid Red 52 in comparison with combined use of other dyes, and further that the combined use of the direct dye gives excellent color tone as a fluorescent red ink, advantageously.

The fluorescent ink of this embodiment is explained below.

The direct dye is explained below which is useful for combination with C.I. Acid Red 52 in the fluorescent ink of this embodiment. A direct dye is

capable of dyeing vegetable fibers (cellulose fiber) such as cotton and rayon directly from an aqueous solution. Most of the direct dyes are of an azo type, generally having a structure of a long molecule having a conjugate system extending in a plane and having at the ends  $-NH_2$  or  $-OH$ , and having a sulfonic group or a carboxylic group. Specifically the direct dyes include Direct Yellow 12, Direct Yellow 44, Direct Yellow 86, Direct Yellow 132, Direct Yellow 142, Direct Red 4, Direct Red 23, Direct Red 31, Direct Red 79, Direct Red 80, Direct Red 81, Direct Red 89, Direct Red 227, Direct Red 243, Direct Blue 6, Direct Blue 22, Direct Blue 25, Direct Blue 71, Direct Blue 78, Direct Blue 86, Direct Blue 90, Direct Blue 106, Direct Blue 199, Direct Black 51, Direct Black 195; Direct Green 11, 21, 34, 42, and 60; Direct Orange 1, 2, 5, 6, 7, 8, 31, 33, 63, 85, 90, 96, 102, and 104; Direct Brown 2, 58, 59, 60, 73, 112, 167, 168, 179, and 185.

Of the direct dyes, the ones having two azo groups or having a dimer structure have particularly high water resistance, and use of such a dye is advantageous as the results of the investigation made by the inventors of the present invention. Presumably, the molecule of the dye of such a structure is symmetric to easily take a regular steric arrangement to cause strong intermolecular force between the dye molecules, whereby the print recorded with the ink containing such



aforementioned range has its maximum absorption wavelength near the fluorescence spectrum 600 nm of C.I. Acid Red 52, which can offset the fluorescence of C.I. Acid Red 52. The dye having the color tone within the aforementioned range gives red color sensation of the ink, making the ink most suitable as the fluorescent red ink. Therefore, the direct dye having the aforementioned color tone is preferably employed.

The fluorescent ink of this embodiment contains more preferably at least one direct dye represented by General Formula (I) shown below. It was found by the inventors of the present invention that the dye represented by General Formula (I) having plural COOH groups as shown in the formula gives prints of high water resistance in printing especially on an acidic or neutral recording medium like paper, and does not significantly impair the fluorescence of C.I. Acid Red 52 when combinedly used advantageously.


Specifically, C.I. Acid Red 52 has the maximum excitation wavelength at 253 nm, and is excited by absorption of energy at this wavelength to produce intense fluorescence having the maximum fluorescence wavelength of 600 nm. However, some direct dyes to be combinedly used with C.I. Acid Red 52 exhibit slight absorption near the 253 nm. Such a direct dye may decrease the fluorescence intensity of C.I. Acid Red 52. However, the direct dye represented by General

00223993 "060601


Formula (I) below in the present invention scarcely causes such disadvantage.

The dye represented by General Formula (I) is a yellow dye. Therefore, use of this dye as the only one direct dye in the dye combination may make the printed information indecipherable after contact of the print with water. To keep the information decipherable even in contact with water, another direct dye selected from the ones mentioned above is preferably employed additionally.

The dye represented by General Formula (I) is explained in detail.

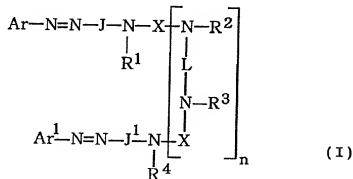

In General Formula (I), Ar and Ar<sup>1</sup> are respectively a substituted aryl or an unsubstituted aryl, and at least one of Ar and Ar<sup>1</sup> has a substituent selected from COOH and COSH; J and J<sup>1</sup> are respectively a group selected from General Formulas (1), (2), and (3) below:

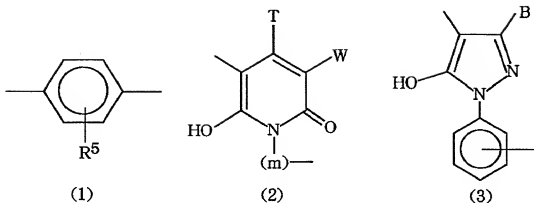

In General Formula (1),  $R^5$  is a group selected from H, alkyls (e.g., a linear or branched alkyl of 1-20 carbon atoms), substituted alkyls (e.g. an alkyl in which at least one hydrogen atom is substituted by a halogen atom (fluorine atom, chlorine atom, bromine atom, etc.) or an alkoxy of 1-3 carbon atoms, etc.), alkoxys (e.g., methoxy, ethoxy, and propoxy), halogen atoms (fluorine atom, chlorine atom, bromine atom, etc.), CN, ureido, and  $NHCOR^6$ .  $R^6$  is selected from H, alkyls (e.g., a linear or branched alkyl of 1-20 carbon atoms), substituted alkyls (e.g. an alkyl in which at least one hydrogen atom is substituted by a halogen atom (fluorine atom, chlorine atom, a bromine atom, etc.) or an alkoxy of 1-3 carbon atoms, etc.), aryls (e.g., a phenyl), substituted aryls (e.g., a phenyl substituted with at least one group selected from halogen atoms (e.g., fluorine atom, chlorine atom, and bromine atom), alkoxys of 1-3 carbon atoms, and linear or branched alkyls of 1-3 carbon atoms), aralkyls (e.g., phenylmethyl, and phenylethyl), and substituted aralkyls (e.g., aralkyls in which the aryl group



constituting the aralkyl is substituted with at least one group selected from halogen atoms (fluorine atom, chlorine atom, bromine atom, etc), linear or branched alkyls of 1-3 carbon atoms, and alkoxys of 1-3 carbon atoms).

In General Formula (2), T is an alkyl (e.g., a linear or branched alkyl of 1-20 carbon atoms) or a substituted alkyl (e.g. an alkyl in which at least one hydrogen atom is substituted by a halogen atom (fluorine atom, chlorine atom, bromine atom, etc.) or an alkoxy of 1-3 carbon atoms, etc.); W is selected from H, CN,  $\text{CONR}^{10}\text{R}^{11}$ , pyridium, and COOH; (m) is an alkylene chain of 2-8 carbon atoms;  $\text{R}^{10}$  and  $\text{R}^{11}$  are respectively selected from H, alkyls (e.g., a linear or branched alkyl of 1-20 carbon atoms), and substituted alkyls (e.g. an alkyl in which at least one hydrogen atom is substituted by a halogen atom (fluorine atom, chlorine atom, bromine atom, etc.), and an alkoxy of 1-3 carbon atoms, etc.).

In General Formula (3), B is selected from H, alkyls (e.g., a linear or branched alkyl of 1-20 carbon atoms), substituted alkyls (e.g. an alkyl in which at least one hydrogen atom is substituted by a halogen atom (fluorine atom, chlorine atom, bromine atom, etc.) or an alkoxy of 1-3 carbon atoms, etc.), and COOH.

In General Formula (I),  $\text{R}^1$ ,  $\text{R}^2$ ,  $\text{R}^3$ , and  $\text{R}^4$  are respectively selected from H, alkyls (e.g., a linear or




atoms, etc.), aryls (e.g., phenyl), substituted aryls (e.g., a phenyl substituted with at least one group selected from halogen atoms (e.g., fluorine atom, chlorine atom, and bromine atom), alkoxys of 1-3 carbon atoms, linear or branched alkyls of 1-3 carbon atoms),  
5 aralkyls (e.g., phenylmethyl, and phenylethyl), and substituted aralkyls (e.g., aralkyls in which the aryl group constituting the aralkyl is substituted with at least one group selected from halogen atoms (fluorine  
10 atom, chlorine atom, bromine atom, etc.), linear or branched alkyls of 1-3 carbon atoms, and alkoxys of 1-3 carbon atoms).  $R^8$  and  $R^9$  may form a five-membered or six-membered ring together with the nitrogen atom bonding therewith.

15       The dyes of General Formula (I) which does not have an  $SO_3H$  group has at least two groups selected from a  $COOH$  group and a  $COSH$  group. The dye of General Formula (I) which has one or more  $SO_3H$  groups has groups selected from a  $COOH$  group and a  $COSH$  group at least in  
20 the same number as the number of  $SO_3H$ .


      Examples of the dye represented by General Formula (I) include C.I. Direct Yellow 173 and compounds exemplified below:

00000-662250


(Dye 1)

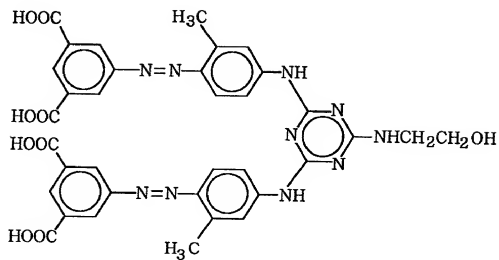


(Dye 2)

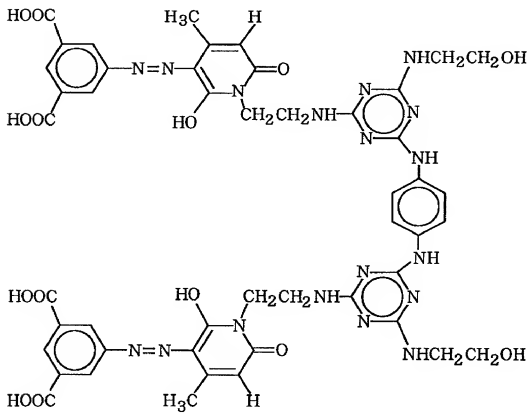


(Dye 3)

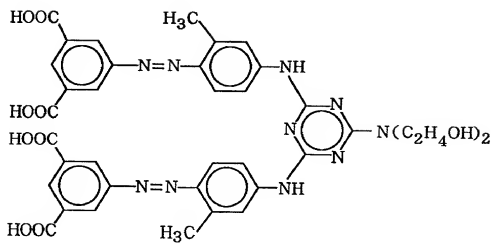


(Dye 4)

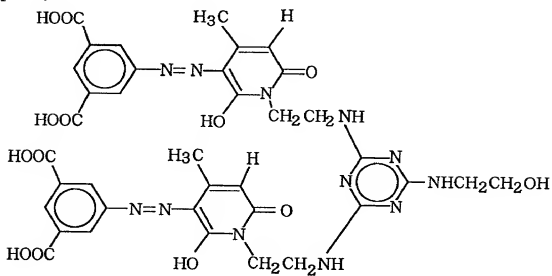


(Dye 5)

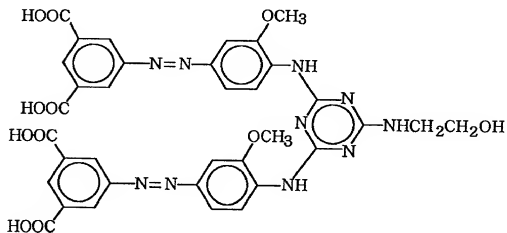


(Dye 6)

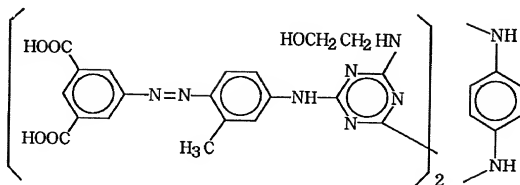


(Dye 7)

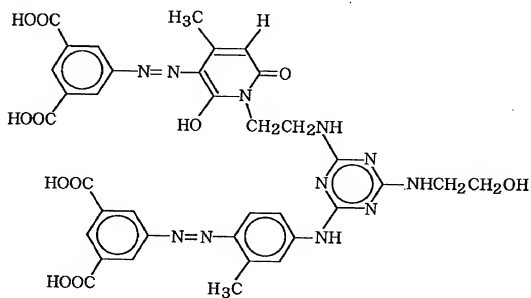


(Dye 8)

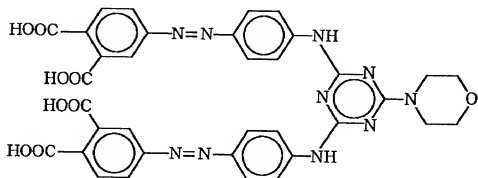


(Dye 9)

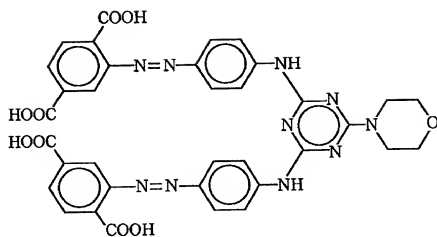

(Dye 10)

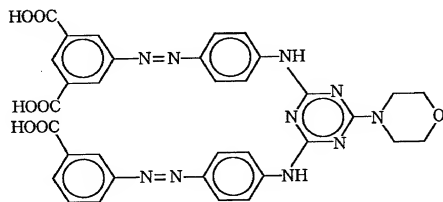


(Dye 11)

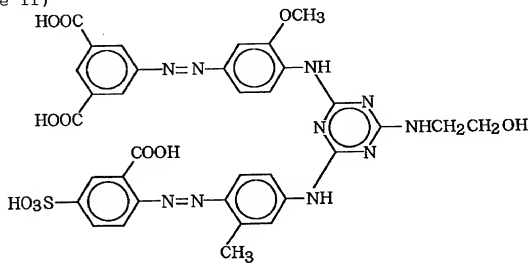

(Dye 12)

- 24 -

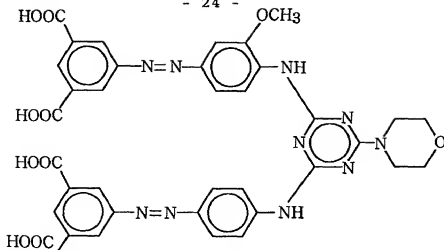

The fluorescent ink of this embodiment contains

C.I. Acid Red 52 at a content ranging preferably from 0.1 to 0.4 wt%, more preferably from 0.2 to 0.3 wt%

based on the total amount of the ink. Generally, the fluorescent dye is known to produce weak fluorescence at a concentration higher than a certain limit as well as at a low concentration: intense fluorescence is produced in a certain concentration range. This

phenomenon is explained by reference to Figs. 8 to 12 for printing on a paper sheet as the recording medium. Fig. 8 shows schematically a state of an ink drop containing a fluorescent coloring material 801 and a solvent 805 immediately before ink drop deposition onto a recording medium containing cellulose fiber 807.

Fig. 9 shows schematically a state of the ink drop deposited and the coloring material fixed onto the paper sheet when the amount of the fluorescent coloring material 801 fixed on the recording medium is small.

In this state, fluorescence intensity is not sufficiently high. On the other hand, as shown in Fig. 10, intense fluorescence can be obtained when the ink







significantly the fluorescence of C.I. Acid Red 52. From the above reasons, the higher water resistance of the print, which is an object of the present invention, can be achieved and a color print can be formed with intense fluorescence by limiting the mixing ratio of the direct dye to C.I. Acid Red 52 to be not higher than 1.6 by weight.

Next, the aqueous liquid medium for constituting the ink of the present invention together with the above-described dyes is explained below. The aqueous liquid medium used in the present invention is preferably constituted mainly of water. The content of water in the ink ranges from 10 to 95 wt%, preferably from 25 to 93 wt%, more preferably from 40 to 90 wt%. The water used in the present invention is preferably deionized water.

In this embodiment, water may be used solely as the aqueous liquid medium of the ink. However, use of an aqueous organic solvent jointly with water will make the effects of the ink more remarkable.

The aqueous organic solvent applicable to the ink of this embodiment includes specifically alkyl alcohols of 1-5 carbon atoms such as methyl alcohol, ethyl alcohol, n-propyl alcohol, isopropyl alcohol, n-butyl alcohol, sec-butyl alcohol, tert-butyl alcohol, isobutyl alcohol, and n-pentanol; amides such as diethylformamide, and dimethylacetamide; ketones and



from 10 to 30 wt%.

Of the aforementioned aqueous organic solvents, particularly preferred are ethylene glycol, diethylene glycol, triethylene glycol, thiodiglycol, glycerin, trimethylolpropane, 1,2,6-hexanetriol, ethyl alcohol, isopropyl alcohol, bishydroxyethyl sulfone, and so forth.

The ink in the present invention may contain, in addition to the above components, urea, thiourea, or a urea derivative, or an additive for imparting the desired properties to the ink such as a pH adjuster, a viscosity adjuster, an antiseptic agent, an antioxidant, an evaporation promotor, a rust preventive, a fungicide, and a chelating agent.

(Second Embodiment)

A second embodiment of the fluorescent ink of the present invention is described below.

The fluorescent ink of this embodiment contains:

(i) a first organic compound and a second organic compound which are incompatible with each other,

(ii) a direct dye, and C.I. Acid Red 52 which is the fluorescent coloring material, and

(iii) a liquid medium for dissolving or dispersing the above components (i) and (ii),

the C.I. Acid Red 52 being contained at a content ranging from 0.1 to 0.4 wt% based on the total amount of the ink, and the direct dye being contained at a



comprises two kinds of organic compounds incompatible with each other, a coloring material combination of C.I. Acid Red 52 with a direct dye, and a liquid medium for dissolving or dispersing the mentioned components

5 will give printings on a recording medium with improvement of fluorescence intensity and color developability, and other printing qualities with stability and reliability of the prints, especially in ink-jet recording. In particular, the fluorescent ink

10 for ink-jet recording of this embodiment of the present invention gives prints with remarkably high fluorescence intensity in comparison with conventional fluorescent ink.

Generally in consideration of the mechanism of the

15 stability and reliability of the printings and fluorescence intensity and the color development of the ink, attention is concentrated to uniformity of dissolution or dispersion of the coloring material in the ink for improving the fluorescence and color

20 development. In other words, in designing of the ink, the investigation is made on the prevention of association of the coloring material molecules or aggregation of dispersed coloring material particles for their smaller size, increase of the optical

25 absorbance of the ink, and retention of the increased absorbance. Efforts are made with such a design to prevent association or aggregation of the coloring

0922993-080801







gas-liquid interface 1905, and the layer 1901 and 1903  
form a liquid-liquid interface 1907. As the results,  
the recorded matter printed with the ink of this  
embodiment reflects light effectively at the liquid-  
5 liquid interface 1907 owing to the formation of the  
layer 1901 having a stable thickness formed by  
formation of the interface. This improves the color  
developability including fluorescence intensity, and  
provides a method for improving remarkably the  
10 fluorescence and color developability of the prints.

The inventors of the present invention found that  
use of a surfactant as one of the two incompatible  
organic compounds gives image with especially excellent  
color developability including fluorescence intensity.  
15 Presumably, the used surfactant forms a surfactant  
micelle layer 2001 (layer A) as the surface layer and  
this layer A effectively reflects the light to improve  
the color developability including fluorescence  
intensity.

20 According to the investigation made by the  
inventors of the present invention, water is preferred  
as the liquid medium for keeping the two incompatible  
organic compounds constituting the fluorescent ink of  
the present invention in a uniform state in the ink.  
25 The use of water as the liquid medium enables use of a  
diversity of compounds as the ink components in  
comparison with liquid mediums other than water to

09022907.000001

enlarge the scope of selection of the ink constituents. Further, the water keeps the quality of the print recorded on wood-free paper; the liquid medium can be removed by penetration into the wood-free paper, and  
5 the image can be stable in evaporation of the liquid medium, advantageously.

The fluorescent ink of this embodiment is preferably applied through a clearance onto a recording medium for recording. The recording with direct  
10 pressure contact with the recording medium like recording with a ball-point pen presses the ink into the recording medium, not achieving the effect of the mechanism of this embodiment.

The constituents other than the above described  
15 coloring materials of the fluorescent ink of this embodiment for achieving the effects of the above mechanism are explained below.

The combination of the two organic compounds incompatible with each other constituting the  
20 fluorescent ink of this embodiment signifies combination of two organic compounds which will separate into layers on simple mixing of only the two organic compounds, like water and oil.

Specifically, in a ternary component system  
25 consisting of two organic compounds incompatible with each other and water as the solvent, the two incompatible organic compounds are dissolved in water

09022993-080601

as the solvent in the initial state. With evaporation  
of the water as the solvent, for example in the  
environment of 50°C, the incompatible organic compounds  
come to cause liquid-liquid separation during the  
5 evaporation of water to achieve the effects of the  
mechanism of this embodiment. The liquid medium for  
the organic compounds is selected from a diversity of  
liquids in consideration of compatibility with the two  
incompatible organic compounds. Particularly preferred  
10 liquid medium is water. This is because of the  
stability of the ink, the quality of the image formed  
with a nonaqueous liquid medium mentioned in the  
explanation of the mechanism, and the freedom in  
selection of the two organic compounds incompatible  
15 with each other.

The two organic compounds incompatible with each  
other may be combination of any compounds which cause  
phase separation into layers like water and oil on  
simple mixing of only the two compounds. A combination  
20 is preferred in which one organic compound has a  
solubility parameter of 15 or more and the other  
organic compound has a solubility parameter of 13 or  
less. The two compounds having closer solubility  
parameters tends to become compatible, which prevents  
25 the effects of the present invention. Incidentally,  
the solubility parameter herein is a value obtained by  
a method of Fedors.

0922993-080801



09223993-080801

solution for the stability of the ink. That is, the surfactant in the water is preferably dissolved or uniformly dispersed in appearance. In particular, nonionic surfactants are preferred which are

5 emulsifiable in an aqueous solution. The content of the nonionic surfactant is preferably not higher than the maximum content at which the surfactant can take an emulsion state to ensure the stability of the ink.

The nonionic surfactant useful in this embodiment

10 are those having an HLB value of not more than 13. The nonionic surfactant having the HLB of 13 or less does not have excessive hydrophilicity of the surfactant, being capable of forming an interface of ink components between the ink and the atmospheric air to achieve the

15 effects of the aforementioned mechanism to improve the color developability including the fluorescence intensity.

The surfactant which has the property intermediate between water and oil to show a cloud point improves


20 the color developability including fluorescence intensity in the surfactant phase. Presumably, the compound material giving fluorescence and/or the fluorescent coloring material is dissolved and/or dispersed in nearly a monomolecular state which is the

25 most suitable state for color development including fluorescence, and a supersaturated component is dissolved and/or dispersed in the phase not compatible


with the surfactant, thereby the color developability including fluorescence being improved.

The nonionic surfactant for the fluorescent ink of this embodiment is contained in the ink at a content preferably not less than 1 wt%, more preferably ranging from 1 to 20 wt%. At the content lower than 1 wt%, the effect of the aforementioned mechanism is not sufficiently achievable, whereas at the content higher than 20 wt%, the balance of the print quality, such as balance between concentration and fixability, and balance between feathering and fixability tends to be impaired.

Of the nonionic surfactants satisfying the above requirements, especially preferred ones in this embodiment include the compound represented by General Formula (II), and the compounds (III)-(VIII) enumerated below.




(In General Formula (II), A and B are independently  $\text{C}_n\text{H}_{2n+1}$  (n is an integer of 1 to 10), and X and Y are an open-ring ethylene oxide unit and/or an open-ring propylene oxide unit.)



(III)

1,5-Sorbitan ester


5



(IV)

1,4-Sorbitan ester


10



(V)


Sorbide ester

15




(VI)

20



(VII)

25




(VIII)

(R: Alkyl of fatty acid)



Of the nonionic surfactants represented by General Formula (II), particularly preferred are the compounds represented by General Formula (IX):

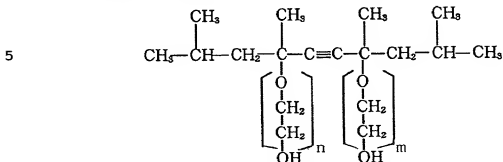

The symbols m and n are integers.

A further effect can be achieved in the fluorescent colored portion of the print by incorporating additionally a glycol compound having a vapor pressure not lower than that of diethylene glycol into the fluorescent ink of the second embodiment of the present invention described above.

The glycol compound having a vapor pressure not lower than that of diethylene glycol is preferably capable of dissolving or dispersing the first and second organic compounds incompatible with each other. For example, the compound has preferably a solubility parameter between the solubility parameters of the incompatible first and second organic compounds. The incorporation of such a compound into the ink of this embodiment improves further the color developability including fluorescence to improve remarkably the fluorescence and coloring ability of the prints, and to

offset effectively the disadvantage of deterioration of fluorescence intensity by exposure of light. This compound depends on the two incompatible organic compounds. For example, in the case where the glycerin group-containing organic compound and a nonionic surfactant are employed as the two incompatible organic compounds, a glycol type compound is preferably used, including ethylene glycol (vapor pressure : 6.7 Pa at 20°C) and diethylene glycol (vapor pressure : 1.33 Pa at 20°C).

Presumably this effect can be achieved by evaporation of the glycol compound having a vapor pressure not lower than that of diethylene glycol, or not lower than the vapor pressure of ethylene glycol or diethylene glycol, on the recording medium. Since such a compound evaporates relatively slowly, immediately after deposition of the ink on the recording medium, the compound is presumably contained in the ink in a sufficient amount. Therefore, the compound exists at the liquid-liquid interface 1907 between the layer 1901 and the layer 1903 shown in Fig. 19, or at least one of the liquid-liquid interface 1907 between the layers 2001 and 1901, and the liquid-liquid interface between the layers 1901 and 1903 shown in Fig. 20 to prevent formation of a definite interface. Therefore, immediately after the printing with this ink, the print gives lower fluorescence intensity than that given by

the ink of the second embodiment not containing the compound. With lapse of time, the compound evaporates gradually to make the above liquid-liquid interface definite to form a structure of the recorded portion for giving high fluorescence intensity. Depending on the environment, fluorescence characteristic may deteriorate with time. However, the print formed with the ink of this embodiment is prevented effectively or nearly completely from deterioration with time in the apparent fluorescence intensity, or sometimes increases the fluorescence intensity. Therefore, fluorescence for a long term is required for the print, such a modified ink of the second embodiment is preferred.

The fluorescent ink of this embodiment is constituted of the aforementioned two organic compounds incompatible with each other, and the aforementioned combination of C.I. Acid Red 52 and a direct dye. The effects of the aforementioned mechanism can be achieved, particularly when C.I. Acid Red 52 is used. By the reasons mentioned before, the ink of this embodiment tends to give the effect with an aqueous system employing water as the liquid medium. Therefore, the coloring material may be a hydrophilic, water-soluble one, or may be a compound, or a coloring material, or combination thereof which is inherently hydrophobic and modified to be hydrophilic by surface treatment to be emulsifiable or apparently soluble in

0022993-00001

water.

In view of the stability of the ink, the fluorescent ink of this embodiment preferably contains a monohydric alcohol additionally. The monohydric alcohol produces a water-oil mixing effect, like water drainage of gasoline, which is preferably in stabilizing the ink in achieving the effect of the aforementioned mechanism. Moreover, the monohydric alcohol is effective for evaporation and for penetration into the recording medium to promote the effect of the present invention. The monohydric alcohol is contained in the ink at a content ranging preferably from 0.1 to 20 wt%, more preferably from 0.5 to 10 wt% based on the total weight of the ink. The monohydric alcohol useful as the ink component of the present invention includes ethanol, isopropanol, and n-butanol.

The fluorescent ink of this embodiment may contain a water-retaining agent. The water-retaining agent is preferably a compound selected from urea and urea derivatives. The incorporation of urea or a urea derivative in the ink improves the stability of the ink, preventing the mechanism of phase separation of the two incompatible organic compounds in the ink at the air-liquid ink interface. Further, the compound selected from urea and urea derivative can serve a co-solvent, which is advantageous also for the stability

09523097-080801





for ink-jet recording. The ink-jet recording method includes a method of recording by application of dynamic energy to the ink to eject ink droplets, and a method of recording by application of thermal energy to cause bubbling to eject ink droplets. The fluorescent ink of the present invention is particularly useful for the ink-jet recording method.

An example of the ink-jet recording apparatus of the present invention is described below which is suitable for printing with the fluorescent ink of the present invention.

Fig. 1 is a sectional view of a head 13 along an ink flow path. Fig. 2 is a sectional view of the head taken along line 2-2 in Fig. 1.

The head 13 is constructed by bonding a plate of glass, ceramics, silicon, plastics, or the like having a flow path (nozzle) 14 for ink flow with a heater element substrate 15 for thermal recording. The heater element substrate 15 is constituted of a protection layer 16 formed from silicon oxide, silicon nitride, silicon carbide, or the like; electrodes 17-1, 17-2 formed from aluminum, gold, aluminum-copper alloy, or the like; a heating resistor layer 18 formed from a high melting material such as  $\text{HfB}_2$ , TaN, and TaAl; a heat-accumulating layer 19 formed from thermally oxidized silicon, aluminum oxide, or the like; and a substrate 20 made of a heat-radiating material such as

00023907.060801

silicon, aluminum, and aluminum nitride.

On application of an electric signal in a pulse state to the electrodes 17-1, 17-2 of the head, the region denoted by a symbol "n" on the heater element substrate 15 generates heat abruptly to form a bubble in the ink 21 on the surface of the heater element substrate, the pressure of the bubble pushes out the meniscus 23 to eject the ink 21 through the nozzle 14 and the orifice 22 in a shape of droplets 24. The ejected ink droplets jump onto a recording sheet 25.

Fig. 3 shows an external appearance of a multiple head having plural heads shown in Fig. 1 in juxtaposition. The multiple head is formed by bonding a glass plate 27 having multiple nozzles 26 with a heat-generating head 28 like the one shown in Fig. 1.

Fig. 4 shows an example of the entire appearance of the ink-jet recording apparatus equipped with the above-described head. In Fig. 4, a blade 61 as a wiping member is held at one end of the blade by a blade-holding member, forming a fixed end in a shape of a cantilever. The blade 61 is placed at a position adjacent to the recording region of the recording head, and, in this example, is held so as to protrude into the moving path of the recording head.

A cap 62 is placed at a home position adjacent to the blade 61, and is constituted such that it moves in the direction perpendicular to the moving direction of

00923993.080001  
10880.0652500



the recording head to come into contact with the  
ejection nozzle face to cap the nozzle. An ink  
absorbent 63 is placed at a position adjacent to the  
blade 61, and is held so as to protrude into the moving  
5 path of the recording head 65 in a manner similar to  
that of the blade 61. The blade 61, the cap 62, and  
the ink absorbent 63 constitute an ejection recovery  
device 64. The blade 61, and the ink absorbent 63  
serve to remove off water, dust, and the like from the  
10 face of the ink ejection nozzle.

A recording head 65 has an energy-generating means  
for the ejection, and conducts recording by ejecting  
the ink onto a recording medium opposing to the  
ejection nozzle face. A carriage 66 is provided for  
15 supporting and moving the recording head 65. The  
carriage 66 is engaged slidably with a guide rod 67. A  
portion of the carriage 66 is connected (not shown in  
the drawing) to a belt 69 driven by a motor 68, so that  
the carriage 66 is movable along the guide rod 67 to  
20 the recording region of the recording head 65 and the  
adjacent region thereto. A paper sheet delivery device  
51 for delivery of a recording medium and a paper sheet  
delivery roller 52 driven by a motor (not shown in the  
drawing) delivers a recording medium to the position  
25 opposing to the ejection nozzle face of the recording  
head.

With the above constitution, the recording medium

0912397-080801  
102800-2-6622660

is delivered with the progress of the recording, and is delivered further to a paper discharge device provided with paper sheet-discharging rollers 53. In the above constitution, when the recording head 65 returns to the home position on completion of recording, the cap 62 of the ejection-recovery device 64 is positioned out of the moving path of the recording head 65, and the blade 61 is allowed to protrude to the moving path. Thereby, the ejecting nozzle face of the recording head 65 is wiped.

For capping the ejection face of the recording head 65, the cap 62 protrudes toward the moving path of the recording head to come into contact with the ejection nozzle face. When the recording head 65 is moved from the home position to the record-starting position, the cap 62 and the blade 61 are at the same position as in the above-mentioned wiping step, so that the ejection nozzle face of the recording head 65 is wiped also in this movement. The recording head is moved to the home position not only at the completion of the recording and at the time of ejection recovery, but is also moved at predetermined intervals during recording from the recording region. The nozzle is wiped by this movement.

Fig. 5 is a sectional view of an example of an ink cartridge 45 which holds an ink to be supplied through an ink supplying member such as a tube. An ink

09023037.080001  
100000.000000

container 40, for example, an ink bag, contains an ink to be supplied, and has a rubber plug 42 at the tip. Insertion of a needle (not shown in the drawing) into the plug 42 enables supply of the ink from the ink bag 40 to the head. A waste-ink absorbent 44 serves to absorb a waste ink. The liquid-contacting face of the ink container is preferably formed from polyolefin, especially polyethylene, in the present invention.

The ink-jet recording apparatus used in the present invention is not limited to the above-mentioned one which has separately a head and an ink cartridge. Integration thereof as shown in Fig. 6 may suitably be employed. In Fig. 6, a recording unit 70 houses an ink holding member such as an ink absorbent, and the ink in the absorbent is ejected from a plurality of orifices of a head 71. The ink absorbent may comprise an inorganic compound, and the ink absorbent may preferably comprise at least one of polyurethane, cellulose, polyvinylacetate, polyolefins etc.

Furthermore, the ink absorbent may have a porous structure. The ink absorbent may have a multi-layer structure. In the case that the ink absorbent has a multi-layer structure, the direction of the multi-layer arrangement of the multi-layer structure may preferably be aligned in an ink discharging direction of the ink container. Furthermore, the ink absorbent may be a fiber flocculate, and such a fiber flocculate may

09023993-080801

preferably be aligned in an ink discharging direction of the ink container. In any case as described above, the ink absorbent may preferably have a face being in contact with the ink container. The ink-holding member  
5 may be of a structure of an ink bag having a spring inside without employing the ink absorbent. An air-communication opening 72 is provided for communication of the cartridge interior with the open air. The recording unit 70 may be used in place of the recording  
10 head 65 shown in Fig. 4, and is made to be mountable to and demountable from the carriage 66.

In another example of the ink-jet recording apparatus which utilizes a dynamic energy, an on-demand ink-jet recording head is employed. The on-demand ink-  
15 jet recording head comprises a nozzle-holding substrate having plural nozzles, and a pressure-generating element constituted of a piezo-electric material opposing to the nozzles and an electroconductive material, and is filled with an ink around the  
20 pressure-generating element. By application of a voltage, the pressure-generating element is displaced to eject the ink droplets through the nozzles.

Fig. 7 shows an example of the constitution of the recording head which is the main portion of the  
25 recording apparatus. This head is constituted of an ink flow path 80 communicating with an ink chamber (not shown in the drawing), an orifice plate 81 for ejecting

0022907 000001

5 a prescribed volume of the ink droplets, a vibration plate 82 for exerting pressure directly to the ink, a piezo-electric element 83 joined to the vibration plate 82 and displacing in response to electric signals, and a substrate 84 for fixing the orifice plate 81, the vibration plate 82, and so forth.

10 In Fig. 7, the ink flow path 80 is formed from a photosensitive resin, or a like material. An ejection orifice 85 is formed through the orifice plate 81 from a metal such as stainless steel, and nickel by boring by electrocasting or press working, or like processing. The vibration plate 82 is formed from a film of a metal such as stainless steel, nickel, and titanium, or a film of high-elasticity resin. The piezo-electric 15 element 83 is made from a dielectric material such as barium titanate, and PZT. In the recording head of the above constitution, pulsed voltage is applied to the piezo-electric element 83 to cause deformation stress therein to deform the vibration plate joined to the 20 piezo-electric element 83, whereby the ink in the ink flow path 80 is pressurized vertically to eject ink droplets (not shown in the drawing) to conduct recording. Such a recording head can be used by incorporation into a recording apparatus similar to 25 that shown in Fig. 4. The recording apparatus with such a recording head may be driven in the same manner as described before.

0922992 080001

<EXAMPLES>

The present invention is explained more specifically by reference to examples and comparative examples. The percentage (%) hereinafter is based on weight unless otherwise mentioned.

(Examples I)

Examples I-1 to I-21 and Comparative Examples I-1 to I-21 were conducted for the first embodiment of the present invention.

The respective inks of Examples and Comparative Examples were prepared by mixing and dissolving the components shown below, filtering the resulting solution with pressure through a membrane filter of a pore size of 0.2  $\mu\text{m}$ . Tables 1 and 2 summarize the coloring materials and the ratio thereof constituting the ink of the Examples and Comparative Examples. The supplementary dyes combinedly used with C.I. Acid Red 52 were selected from those having the values of  $a^*$  ranging from -20 to 60,  $b^*$  ranging from -5 to 60, and  $\sqrt{(a^2+b^2)}$  of 30 or more.

Example I-1

Acid Red 52	0.1%
Direct Yellow 142	0.15%
Thiodiglycol	10.0%
Glycerin	7.5%
Pure water	82.25%

Example I-2

	Acid Red 52	0.2%
	Direct Red 227	0.3%
	2-Pyrrolidone	7.0%
	Glycerin	5.0%
5	Urea	7.0%
	Pure water	80.5%

Example I-3

	Acid Red 52	0.27%
	Direct Red 80	0.02%
10	Direct Yellow 132	0.1%
	Glycerin	7.5%
	Diethylene glycol	5.0%
	Isopropylene glycol	3.0%
	Pure water	84.11%

15 Example I-4

	Acid Red 52	0.25%
	Direct Red 80	0.15%
	Direct Yellow 86	0.15%
	Thiodiglycol	10.0%
20	Glycerin	7.5%
	Pure water	81.95%

Example I-5

	Acid Red 52	0.25%
	Direct Red 227	0.35%
25	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%

09022003-000001





	Direct Yellow 86	0.3%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Pure water	81.9%
5	Example I-10	
	Acid Red 52	0.25%
	Direct Red 80	0.05%
	Exemplified Dye 1	0.3%
	Thiodiglycol	10.0%
10	Glycerin	7.5%
	Triethylene glycol	3.0%
	Pure water	78.9%
	Example I-11	
	Acid Red 52	0.25%
15	Direct Red 80	0.1%
	Exemplified Dye 2	0.3%
	Ethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%
20	Ethanol	5.0%
	Pure water	77.35%
	Example I-12	
	Acid Red 52	0.3%
	Direct Yellow 132	0.25%
25	Direct Red 80	0.05%
	Glycerin	7.5%
	Diethylene glycol	5.0%

09923493 - 020301

	Isopropylene glycol	3.0%
	Pure water	83.9%
	Example I-13	
	Acid Red 52	0.4%
5	Direct Yellow 142	0.16%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%
	Pure water	78.94%
10	Example I-14	
	Acid Red 52	0.1%
	Exemplified Dye 1	0.15%
	Thiodiglycol	10.0%
	Glycerin	7.5%
15	Pure water	82.25%
	Example I-15	
	Acid Red 52	0.2%
	Exemplified Dye 3	0.3%
	2-Pyrrolidone	7.0%
20	Glycerin	5.0%
	Urea	7.0%
	Pure water	80.5%
	Example I-16	
	Acid Red 52	0.25%
25	Exemplified Dye 1	0.1%
	Exemplified Dye 2	0.05%
	Glycerin	7.5%

002293-00001

	Diethylene glycol	5.0%
	Isopropylene glycol	3.0%
	Pure water	84.1%
	Example I-17	
5	Acid Red 52	0.25%
	Exemplified Dye 1	0.3%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Pure water	81.95%
10	Example I-18	
	Acid Red 52	0.25%
	Exemplified Dye 2	0.35%
	Thiodiglycol	10.0%
	Glycerin	7.5%
15	Triethylene glycol	3.0%
	Pure water	78.9%
	Example I-19	
	Acid Red 52	0.25%
	Exemplified Dye 5	0.4%
20	Ethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
	Pure water	77.35%
25	Example I-20	
	Acid Red 52	0.3%
	Exemplified Dye 1	0.1%

	Exemplified Dye 2	0.1%
	Exemplified Dye 7	0.1%
	Glycerin	7.5%
	Diethylene glycol	5.0%
5	Isopropylene glycol	3.0%
	Pure water	83.9%

Example I-21

	Acid Red 52	0.4%
	Exemplified Dye 2	0.16%
10	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%
	Pure water	78.94%

0923993 080801

Table 1: COLORING MATERIAL COMPOSITION OF THE INK IN  
EXAMPLES 1-21

Example No.	C.I. Acid Red 52 (wt%) (A)	Supplementary coloring material		Ratio of (B):(A)
		Type	Content (wt%) (B)	
I-1	0.1	Direct Yellow 142	0.15	1.5
I-2	0.2	Direct Red 227	0.3	1.5
I-3	0.27	Direct Red 80 &	0.02	0.48
		Direct Yellow 132	0.1	
I-4	0.25	Direct Red 80 &	0.15	1.2
		Direct Yellow 86	0.15	
I-5	0.25	Direct Red 227	0.35	1.4
I-6	0.25	Direct Red 227	0.4	1.6
I-7	0.3	Direct Yellow 132 &	0.25	1.0
		Direct Blue 199	0.05	
I-8	0.4	Direct Blue 199	0.16	0.4
I-9	0.25	Direct Red 80 &	0.05	1.4
		Direct Yellow 86	0.3	
I-10	0.25	Direct Red 80 &	0.05	1.4
		Exemplified Dye 1	0.3	
I-11	0.25	Direct Red 80 &	0.1	1.6
		Exemplified Dye 2	0.3	
I-12	0.3	Direct Yellow 132 &	0.25	1.0
		Direct Red 80	0.05	
I-13	0.4	Direct Yellow 142	0.16	0.4
I-14	0.1	Exemplified Dye 1	0.15	1.5
I-15	0.2	Exemplified Dye 3	0.3	1.5
I-16	0.25	Exemplified Dye 1 &	0.1	0.6
		Exemplified Dye 2	0.05	
I-17	0.25	Exemplified Dye 1	0.3	1.2
I-18	0.25	Exemplified Dye 2	0.35	1.4
I-19	0.25	Exemplified Dye 5	0.4	1.6
I-20	0.3	Exemplified Dye 1	0.1	1.0
		Exemplified Dye 2 &	0.1	
		Exemplified Dye 7	0.1	
I-21	0.4	Exemplified Dye 2	0.16	0.4

09923993-080001



	Direct Red 80	0.05%
	Direct Yellow 86	0.05%
	Glycerin	7.5%
	Diethylene glycol	5.0%
5	Isopropylene glycol	3.0%
	Pure water	84.1%

### Comparative Example I-6

	Acid Red 52	0.25%
	Direct Yellow 132	0.45%
10	Ethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
	Pure water	77.3%

15 Comparative Example I-7

	Acid Red 52	0.45%
	Direct Yellow 132	0.3%
	Glycerin	7.5%
	Diethylene glycol	5.0%
20	Isopropylene glycol	3.0%
	Pure water	83.75%

### Comparative Example I-8

25	Acid Red 52	0.25%
	Direct Red 227	0.5%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%

	Pure water	78.75%
	Comparative Example I-9	
	Acid Red 52	0.1%
	Direct Yellow 142	0.1%
5	Diethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
	Pure water	77.8%
10	Comparative Example I-10	
	Acid Red 52	0.2%
	Direct Red 227	0.35%
	2-Pyrrolidone	7.0%
	Glycerin	5.0%
15	Urea	7.0%
	Pure water	80.45%
	Comparative Example I-11	
	Acid Red 52	0.25%
	Direct Red 80	0.2%
20	Exemplified Dye 2	0.25%
	Ethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
25	Pure water	77.3%
	Comparative Example I-12	
	Acid Red 52	0.45%

[illegible]



	Direct Yellow 132	0.25%
	Direct Red 80	0.05%
	Glycerin	7.5%
	Diethylene glycol	5.0%
5	Isopropylene glycol	3.0%
	Pure water	83.75%

### Comparative Example I-13

	Acid Red 52	0.08%
	Exemplified Dye 1	0.15%
10	Thiodiglycol	10.0%
	Glycerin	7.5%
	Pure water	82.27%

Comparative Example I-14

	Acid Red 52	0.25%
15	Exemplified Dye 1	0.05%
	Exemplified Dye 2	0.05%
	Glycerin	7.5%
	Diethylene glycol	5.0%
	Isopropylene glycol	3.0%
20	Pure water	84.15%

Comparative Example I-15

	Acid Red 52	0.3%
	Exemplified Dye 5	0.45%
	Ethylene glycol	8.0%
25	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%

	Pure water	77.25%
	Comparative Example I-16	
	Acid Red 52	0.45%
	Exemplified Dye 7	0.3%
5	Glycerin	7.5%
	Diethylene glycol	5.0%
	Isopropylene glycol	3.0%
	Pure water	83.75%
	Comparative Example I-17	
10	Acid Red 52	0.25%
	Exemplified Dye 2	0.5%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%
15	Pure water	78.75%
	Comparative Example I-18	
	Acid Red 52	0.1%
	Exemplified Dye 9	0.2%
	Diethylene glycol	8.0%
20	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
	Pure water	77.7%
	Comparative Example I-19	
25	Acid Red 52	0.2%
	Exemplified Dye 3	0.35%
	2-Pyrrolidone	7.0%

092397 = 000031

Glycerin	5.0%
Urea	7.0%
Pure water	80.45%

Comparative Example I-20

5	Acid Red 52	0.2%
	Direct Red 227	0.35%
	2-Pyrrolidone	7.0%
	Ethanol	5.0%
	Urea	7.0%
10	Pure water	Balance

Comparative Example I-21

	Acid Red 52	0.25%
	Direct Red 80	0.1%
	Direct Yellow 86	0.05%
15	Glycerin	7.5%
	Diethylene glycol	5.0%
	Isopropylene glycol	3.0%
	Pure water	Balance

0002397 080801

Table 2: COLORING MATERIAL COMPOSITION OF THE INK  
IN COMPARATIVE EXAMPLES 1-21

Comparative Example No.	C.I. Acid Red 52 (wt%) (A)	Supplementary coloring material		Ratio of (B):(A)
		Type	Content (wt%) (B)	
I-1	0.3	-	-	-
I-2	0.2	Solvent Green 7	0.3	1.5
I-3	0.3	Acid Yellow 23	0.25	0.83
I-4	0.08	Direct Yellow 142	0.15	1.88
I-5	0.3	Direct Red 80 &	0.05	0.33
		Direct Yellow 86	0.05	
I-6	0.25	Direct Yellow 132	0.45	1.8
I-7	0.45	Direct Yellow 132	0.30	0.67
I-8	0.25	Direct Red 227	0.5	2.0
I-9	0.1	Direct Yellow 142	0.1	1.0
I-10	0.2	Direct Red 227	0.35	1.75
I-11	0.25	Direct Red 80 &	0.2	1.8
		Exemplified Dye 2	0.25	
I-12	0.45	Direct Yellow 132 &	0.25	0.67
		Direct Red 80	0.05	
I-13	0.08	Exemplified Dye 1	0.15	1.88
I-14	0.25	Exemplified Dye 1 &	0.05	0.4
		Exemplified Dye 2	0.05	
I-15	0.3	Exemplified Dye 5	0.45	1.5
I-16	0.45	Exemplified Dye 7	0.3	0.67
I-17	0.25	Exemplified Dye 2	0.5	2.0
I-18	0.1	Exemplified Dye 9	0.2	2.0
I-19	0.2	Exemplified Dye 3	0.35	1.75
I-20	0.2	Direct Red 227	0.35	1.75
I-21	0.25	Direct Red 80 &	0.1	0.6
		Direct Yellow 86	0.05	

0902993 080801

<Evaluation>

Printing was conducted with the inks of Examples I-1 to I-21 and Comparative Examples I-1 to I-21, and the formed prints were evaluated for the items below.

(Evaluation 1: Water Resistance)

On plain paper (commercial acidic paper), alphabet and numeral characters were printed by means of an ink-jet recording apparatus BJC-4000 (manufactured by Canon Inc.) having an on-demand type multiple recording head which ejects ink by application of thermal energy to the ink in correspondence with recording signals. The prints were left standing for one hour or longer. Then water was dropped on the printed characters. After drying, the state of the printed characters was visually examined and evaluated according to the evaluation standard shown below.

Tables 3 and 4 show the results.

- A: The print is definitely decipherable.
- B: The print is slightly thin, but is decipherable.
- C: The print is recognizable, but not decipherable.
- D: The print is completely erased.

(Evaluation 2: Fluorescence Intensity)

On plain paper (commercial acidic paper), 50%-grid pattern was printed by means of an ink-jet recording apparatus BJC-4000 (manufactured by Canon Inc.) having an on-demand type multiple recording head

which ejects ink by application of thermal energy to the ink in correspondence with recording signals. The fluorescence intensity was measured at the maximum fluorescence wavelength with the excitation at wavelength of 263 nm by means of a fluorometer (FP-750, manufactured by Nippon Bunko K.K.). The measured fluorescence intensity values were normalized by taking the fluorescence intensity of Comparative Example 1 as 100. The normalized fluorescence intensities were evaluated according to the standard below. Tables 3 and 4 show the results.

A: The normalized intensity is 80 or higher.

B: The normalized intensity ranges from 60 to 79.

C: The normalized intensity ranges from 50 to 59.

D: The normalized intensity is 49 or lower.

Table 3: Evaluation Results  
of Examples I-1 to I-21

Example No.	Water resistance	Fluorescence intensity
I-1	B	B
I-2	B	B
I-3	B	A
I-4	B	A
I-5	B	A
I-6	B	B
I-7	B	A
I-8	B	B
I-9	B	A
I-10	A	A
I-11	A	B
I-12	B	A
I-13	B	B
I-14	B	B
I-15	A	A
I-16	B	A
I-17	A	A
I-18	A	A
I-19	A	B
I-20	A	A
I-21	B	B

09923993-080801

Table 4: Evaluation Results of  
Comparative Examples I-1 to I-21

Comparative Example No.	Water resistance	Fluorescence intensity
I-1	D	-
I-2	D	B
I-3	D	B
I-4	B	C
I-5	C	A
I-6	A	C
I-7	B	C
I-8	A	D
I-9	C	B
I-10	B	C
I-11	A	C
I-12	B	C
I-13	B	C
I-14	C	A
I-15	A	C
I-16	A	C
I-17	A	D
I-18	A	D
I-19	A	C
I-20	A	C
I-21	C	A

(Note: Above Comparative Examples I-20 and I-21  
correspond to Comparative Examples II-10 and II-21.)

(Examples II)

Examples II-1 to II-21 and Comparative Examples  
II-1 to II-21 were conducted for the second embodiment  
of the present invention.

The respective inks of Examples and Comparative  
Examples were prepared by mixing and dissolving the  
components shown below, filtering the resulting  
solution with pressure through a membrane filter of a  
pore size of 0.2  $\mu\text{m}$ . Table 5 summarizes the coloring

00923993-080804



materials and the ratio thereof constituting the ink of the Example and Comparative Examples.

The nonionic surfactant having the above described Formula (VIII) was used in the Examples. The HLB value varies depending on the value of  $n + m$  in the Formula (VIII). The HLB value of the nonionic surfactant used is indicated in Table 5.

### Example II-1

	Acid Red 52	0.1%
10	Direct Yellow 142	0.15%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Compound of General Formula (II)	
	(A and B: $C_4H_7$ , X: $(C_2H_4O)_n$ , Y: $(C_2H_4O)_m$ , $n+m=10$ )	
15		2.0%
	Pure water	Balance

### Example II-2

	Acid Red 52	0.2%
	Direct Red 227	0.3%
20	2-Pyrrolidone	7.0%
	Glycerin	8.0%
	Ethanol	5.0%
	Urea	7.0%
	Compound of General Formula (II)	
25	(A and B: $C_4H_7$ , X: $(C_2H_4O)_n$ , Y: $(C_2H_4O)_m$ , $n+m=10$ )	
		2.0%
	Compound of General Formula (II)	

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=5$ )

0.18

Pure water

Balance

### Example II-3

5	Acid Red 52	0.25%
---	-------------	-------

Direct Red 80 0.1%

Direct Yellow 86 0.05%

Glycerin	7.5%
----------	------

Diethylene glycol	5.0%
-------------------	------

10	Isopropylene glycol	3.0%
----	---------------------	------

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

1.08

Compound of General Formula (II)

15 (A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=5$ )

0.1%

Pure water

Balance

### Example II-4

Acid Red 52 0.25%

20	Direct Red 80	0.15%
----	---------------	-------

Direct Yellow 86	0.15%
------------------	-------

Thiodiglycol	10.0%
--------------	-------

Glycerin	7.5%
----------	------

Compound of General Formula (II)

25 (A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

1.58

Pure water

Balance

## 5

Compound of General Formula (II)

2.5%

10

## 15

Compound of General Formula (II)

20

Pure water

## 25

Acid Red 52	0.3%
Direct Yellow 132	0.25%
Direct Blue 199	0.05
Glycerin	7.5%
Diethylene glycol	5.0%

Isopropylene glycol	3.0%
---------------------	------

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.0%

5	Pure water	Balance
---	------------	---------

### Example II-8

Acid Red 52 0.4%

Direct Blue 199	0.16%
-----------------	-------

Thiodiglycol	10.0%
--------------	-------

10	Glycerin	7.5%
----	----------	------

Triethylene glycol	3.0%
--------------------	------

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.0%

15	Pure water	Balance
----	------------	---------

### Example II-9

Acid Red 52                      0.25%

Direct Red 80 0.05%

Direct Yellow 86 0.3%

20	Thiodiglycol	10.0%
----	--------------	-------

Glycerin	7.5%
----------	------

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.0%

25	Pure water	Balance
----	------------	---------

### Example II-10

Acid Red 52                      0.25%

	Direct Red 80	0.05%
	Exemplified Dye 1	0.3%
	Thiodiglycol	10.0%
	Glycerin	7.5%
5	Triethylene glycol	3.0%
	Compound of General Formula (II)	
	(A and B: $C_4H_7$ , X: $(C_2H_4O)_n$ , Y: $(C_2H_4O)_m$ , $n+m=10$ )	
		1.5%

	Pure water	Balance
10	Example II-11	
	Acid Red 52	0.25%
	Direct Red 80	0.1%
	Exemplified Dye 2	0.3%
	Ethylene glycol	8.0%
15	Glycerin	6.0%
	Triethylene glycol	3.0%
	Ethanol	5.0%
	Compound of General Formula (II)	
	(A and B: $C_4H_7$ , X: $(C_2H_4O)_n$ , Y: $(C_2H_4O)_m$ , $n+m=10$ )	
20		1.5%

	Pure water	Balance
	Example II-12	
	Acid Red 52	0.3%
	Direct Yellow 132	0.25%
25	Direct Red 80	0.05%
	Glycerin	7.5%
	Diethylene glycol	5.0%

Isopropylene glycol 3.0%

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

1.5%

5 Pure water Balance

Example II-13

Acid Red 52 0.4%

Direct Yellow 142 0.16%

Thiodiglycol 10.0%

10 Glycerin 7.5%

Triethylene glycol 3.0%

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.5%

15 Pure water Balance

Example II-14

Acid Red 52 0.1%

Exemplified Dye 1 0.15%

Thiodiglycol 10.0%

20 Glycerin 7.5%

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.0%

Compound of General Formula (II)

25 (A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=5$ )

0.1%

Pure water Balance

09023993 080801



(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

1.5%

Pure water

Balance

### Example II-18

5	Acid Red 52	0.25%
	Exemplified Dye 2	0.35%
	Thiodiglycol	10.0%
	Glycerin	7.5%
	Triethylene glycol	3.0%

10           Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

2.0%

Pure water

Balance

### Example II-19

15	Acid Red 52	0.25%
	Exemplified Dye 5	0.4%
	Ethylene glycol	8.0%
	Glycerin	6.0%
	Triethylene glycol	3.0%

20	Ethanol	5.0%
----	---------	------

Compound of General Formula (II)

(A and B:  $C_4H_7$ , X:  $(C_2H_4O)_n$ , Y:  $(C_2H_4O)_m$ ,  $n+m=10$ )

1.5%

Pure water

Balance

25      Example II-20

Acid Red 52 0.3%

Exemplified Dye 1	0.1%
-------------------	------





Table 5: COLORING MATERIAL COMPOSITION OF THE INK IN  
EXAMPLES

Example No.	C.I. Acid Red 52 (wt%) (A)	Supplementary coloring material		Ratio of (B):(A)
		Type	Content (wt%) (B)	
II-1	0.1	Direct Yellow 142	0.15	1.5
II-2	0.2	Direct Red 227	0.3	1.5
II-3	0.25	Direct Red 80 &	0.1	0.6
		Direct Yellow 86	0.05	
II-4	0.25	Direct Red 80 &	0.15	1.2
		Direct Yellow 86	0.15	
II-5	0.25	Direct Red 227	0.35	1.4
II-6	0.25	Direct Red 227	0.4	1.6
II-7	0.3	Direct Yellow 132 &	0.25	1.0
		Direct Blue 199	0.05	
II-8	0.4	Direct Blue 199	0.16	0.4
II-9	0.25	Direct Red 80 &	0.05	1.4
		Direct Yellow 86	0.3	
II-10	0.25	Direct Red 80 &	0.05	1.4
		Exemplified Dye 1	0.3	
II-11	0.25	Direct Red 80 &	0.1	1.6
		Exemplified Dye 2	0.3	
II-12	0.3	Direct Yellow 132 &	0.25	1.0
		Direct Red 80	0.05	
II-13	0.4	Direct Yellow 142	0.16	0.4
II-14	0.1	Exemplified Dye 1	0.15	1.5
II-15	0.2	Exemplified Dye 3	0.3	1.5
II-16	0.25	Exemplified Dye 1 &	0.1	0.6
		Exemplified Dye 2	0.05	
II-17	0.25	Exemplified Dye 1	0.3	1.2
II-18	0.25	Exemplified Dye 2	0.35	1.4
II-19	0.25	Exemplified Dye 5	0.4	1.6
II-20	0.3	Exemplified Dye 1	0.1	1.0
		Exemplified Dye 2	0.1	
		Exemplified Dye 7 &	0.1	
II-21	0.4	Exemplified Dye 2	0.16	0.4

108080\*2662260

(Comparative Example II-1 to II-21)

The printing was conducted in the same manner as in Comparative Examples I-1 to I-9, and I-11 to I-21, and the evaluation was made as below.

5 (Evaluation 1: Water Resistance)

The water resistance was evaluated in the same manner as in Examples I-1 to I-21 and Comparative Examples I-1 to I-21.

(Evaluation 2: Fluorescence Intensity)

10 The fluorescence intensity was measured in the same manner as in Examples I-1 to I-21 and Comparative Examples I-1 to I-21 except that the excitation wavelength was changed to 254 nm. Presuming higher fluorescence intensity in Examples II, the evaluation  
15 standard was changed to meet higher fluorescence intensity in comparison with the intensities in Examples I.

A: The normalized intensity is 120 or higher.

B: The normalized intensity ranges from 119 to 101.

20 C: The normalized intensity ranges from 100 to 80.

D: The normalized intensity is 79 or lower.

0922993 "080801

Example No.	Water resistance	Fluorescence intensity	Comparative Example No.	Water resistance	Fluorescence intensity
II-1	B	B	II-1	D	-
II-2	B	B	II-2	D	D
II-3	B	A	II-3	D	D
II-4	B	A	II-4	B	D
II-5	B	A	II-5	C	C
II-6	B	B	II-6	A	D
II-7	B	A	II-7	B	D
II-8	B	B	II-8	A	D
II-9	B	A	II-9	C	D
II-10	A	A	II-10	A	D
II-11	A	B	II-11	B	D
II-12	B	A	II-12	B	D
II-13	B	B	II-13	C	C
II-14	B	B	II-14	A	D
II-15	A	A	II-15	A	D
II-16	B	A	II-16	A	D
II-17	A	A	II-17	A	D
II-18	A	A	II-18	A	D
II-19	A	B	II-19	A	D
II-20	A	A	II-20	C	C
II-21	B	B	-	-	-

As described above, the present invention provides a red fluorescent ink capable of forming prints with high water resistance, high fluorescence intensity, and excellent color tone. The present invention provides also an ink unit, and an ink cartridge holding this ink. The present invention further provides a ink-jet recording method and an ink-jet recording apparatus employing the ink unit or the ink cartridge to give water-resistant fluorescent prints.

09923993 080801